

# RAD WHEEL NUT & OTR MINING 15NDX-R

Part Number: **20810**




## LIGHTER **FASTER** STRONGER

Accidents caused by incorrectly tightened wheel nuts are a serious problem. That's why the RAD Wheel Nut Bolting was designed with one job in mind: wheel nut bolting where torque control is a must.

### SPECIFICATIONS

Torque Ranges: 300 ft. lbs. - 1500 ft. lbs.  
Speed: 10 RPM  
Weight: 16.0 lbs.  
Square Drive: 1.0"  
Noise Level: 80 dB  
Repeatability: +/-2%  
Accuracy: +/-4%

### DIMENSIONS

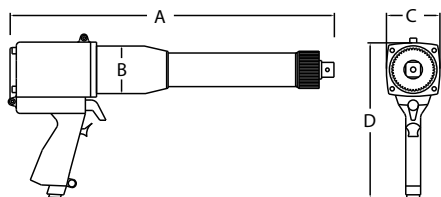

| DIMENSION<br>A | DIMENSION<br>B | DIMENSION<br>C | DIMENSION<br>D | DIMENSION<br>E |
|----------------|----------------|----------------|----------------|----------------|
| 21.35"         | 2.7"           | 2.7"           | 2.75"          | 8.02"          |



Non  
Impacting



Safe &  
Reliable



Class 1 Division  
2 Group A, B,  
C, D T4



Accredited  
ISO/IEC 17025

### Included Tool Holder

With FRL unit, 12' hose and fittings



### SUITABLE REACTION ARMS

**Standard**  
PN: ?



**Deep Socket**  
PN: ?



**Double Ended Arm**  
PN: ?



**Blank**  
PN: ?



**Double Ended Blank**  
PN: ?



**Retaining Ring**  
PN: ?



## NEW WORLD TECHNOLOGIES INC

#100 - 30722 MARSHALL RD | ABBOTSFORD, BC V2T 0H9 | CANADA  
604.852.0405 | INFO@RADTORQUE.COM | RADTORQUE.COM